



PROJOLLY SQUARE



DESCRIPTION

PROJOLLY SQUARE is a square corner bead profile that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic and natural stone tiles and also as separation profile for floor coverings. Its particular section and variety of finishes, make **PROJOLLY SQUARE** an elegant and much sought after profile.

MATERIAL

PROJOLLY SQUARE is a square corner bead profile in anodized silver, copper, titanium and black aluminum, polished chrome, copper, titanium and black aluminum, brushed silver, copper, titanium and black aluminum and brushed tiltex silver, copper and titanium aluminium available in the heights of 4.5 – 6 – 8 – 10 – 11 and 12.5 mm. It has a punched flange that guarantees a perfect grip to the adhesive. The high range of finishes, combined with the availability of different heights and special pieces such as, internal and external corners, end caps and junctions, make **PROJOLLY SQUARE** an elegant and much sought after profile.

AREAS OF USE

PROJOLLY SQUARE in anodized, polished, brushed and brushed tiltex aluminium is suitable for indoors environment where good resistance to mechanical and chemical stresses are required.



WARNINGS



Do not use **PROJOLLY SQUARE** in anodized, polished, brushed and brushed tiltex aluminium outdoors and in environments where aggressive substances are used. Clean immediately the surface of the profile from all remains of adhesive or grout after laying; the permanence of these substances on the surface may lead to formation of non-removable aluminium hydroxide (dark halos).

MAINTENANCE

PROJOLLY SQUARE does not require any special maintenance. It is suggested to clean it with normal household cleaning products.

LAYING INSTRUCTIONS

1. Choose "**PROJOLLY SQUARE**" according to the tile thickness and desired finish.
2. Cut "**PROJOLLY SQUARE**" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "**PROJOLLY SQUARE**" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

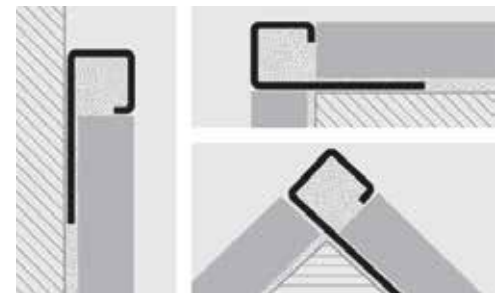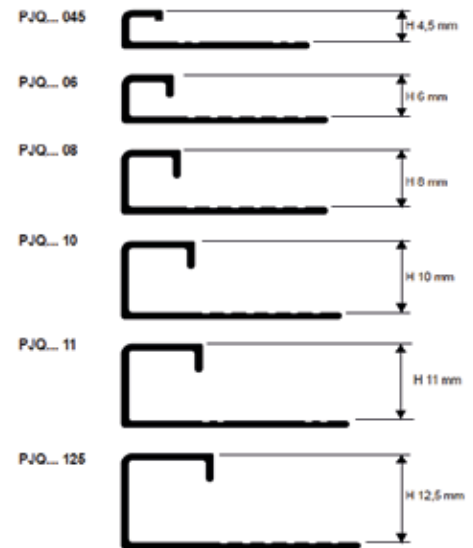

TEXT TEMPLATE FOR TENDERS

Delivery and installation of square corner bead profile in anodized silver - copper - titanium - black aluminum / polished chrome - copper - titanium - black aluminum / brushed silver - copper - titanium - black aluminum / brushed tiltex silver - copper - titanium aluminium . With a height of mm and equipped with a punched flange that guarantees a perfect grip to the adhesive, like PROJOLLY SQUARE of the Progress Profiles company.

PJQ... 045 / 06 / 08 / 10 / 11 / 125 : Anodized, polished, brushed and brushed Tiltex aluminium.

Profile height : _____ mm
 Profile length : _____ mt
 Material : _____ €/mt
 Application : _____ €/mt
 Total value : _____ €/mt