




PROEXPAN 115



PENF 115...

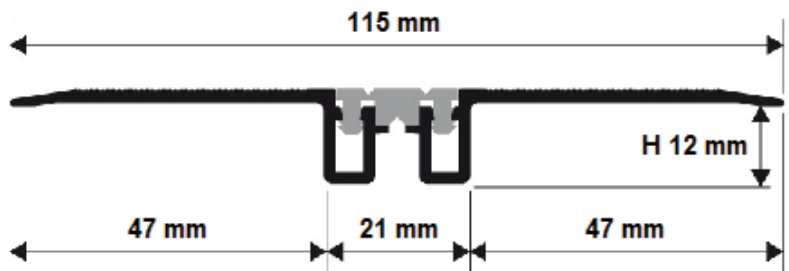

DESCRIPTION

PROEXPAN 115 is a structural joint composed of two structures in aluminium, to be fixed on the flooring, connected together with an expandable insert in vinyl resin-rubber.

MATERIAL

PROEXPAN 115 is a structural joint composed of two structures in natural aluminium, with a visible knurled surface of 47 mm, connected together with an expandable interchangeable insert in vinyl resin-rubber. The expandable interchangeable insert in vinyl resin-rubber, with a visible surface of 21 mm, is available in grey and black (on demand in Ivory and beige). The joint has a total width of 115 mm and guarantees a compression movement of 3 mm and an expansion one of 4 mm. The aluminium structures can be fixed on the flooring using epoxy resin. The high quality and elasticity of the expandable insert, make **PROEXPAN 115** the right solution for structural joints.

AREAS OF USE

PROEXPAN 115 in natural aluminium is suitable for the realisation of structural joints in environments where a good chemical and mechanical resistance is required.

WARNINGS


Do not use **PROEXPAN 115** in natural aluminium in swimming pool, where strong substances are used and in case of concentrated loads.

MAINTENANCE

PROEXPAN 115 does not require any special maintenance; it is suggested to clean it with normal household cleaning products.

LAYING INSTRUCTIONS

1. Choose "**PROEXPAN 115**" in the desired colour.
2. Fix the natural aluminium structure on the flooring using a double-component epoxy resin.

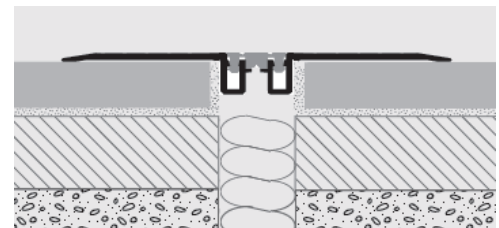

TEXT TEMPLATE FOR TENDERS

Delivery and installation of structural joint composed of two structures in natural aluminium, with a visible knurled surface of 47 mm, connected together with a black / grey expandable interchangeable insert in vinyl resin-rubber. The expandable interchangeable insert has a visible surface of 21 mm. The joint has a total width of 115 mm and guarantees a compression movement of 3 mm and an expansion one of 4 mm. The aluminium structures can be fixed on the flooring using epoxy resin, like **PROEXPAN 115** of the Progress Profiles company.

PENF 115... : Natural aluminium and vinyl resin-rubber

Profile width : _____ mm
 Profile length : _____ mt
 Material : _____ €/mt
 Application : _____ €/mt
 Total value : _____ €/mt

