

MIDI CHANNEL H.50 WITH BLACK SLOT GRATING

H.20 WITH STAINLESS STEEL PROFILE



INDEX

1. Code Registry
2. Use
3. Flow rate
4. Technical Specification


1. CODE REGISTRY

Code	Description	Dimensions (mm)	Weight	Colour	Pkg. / Pallet
POZ90-1475FI/20	Midi Channel h.50 with Black Slot Grating h.20 with Stainless steel profile	121 x 70 x 1.000	1,00 kg/pc.	Black	1 pc. / 190 pcs

MATERIAL

Channel made of PP (polypropylene) - Grating made of PP (polypropylene) with stainless steel profile.


CHANNEL TECHNICAL DETAILS

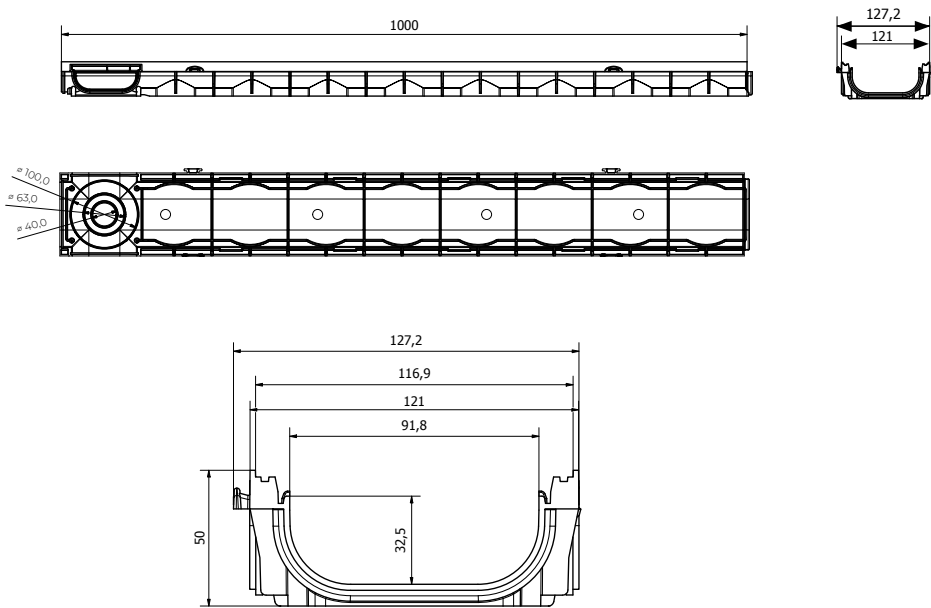


MIDI CHANNEL H.50 WITH BLACK SLOT GRATING

H.20 WITH STAINLESS STEEL PROFILE

GRATING TECHNICAL DETAILS

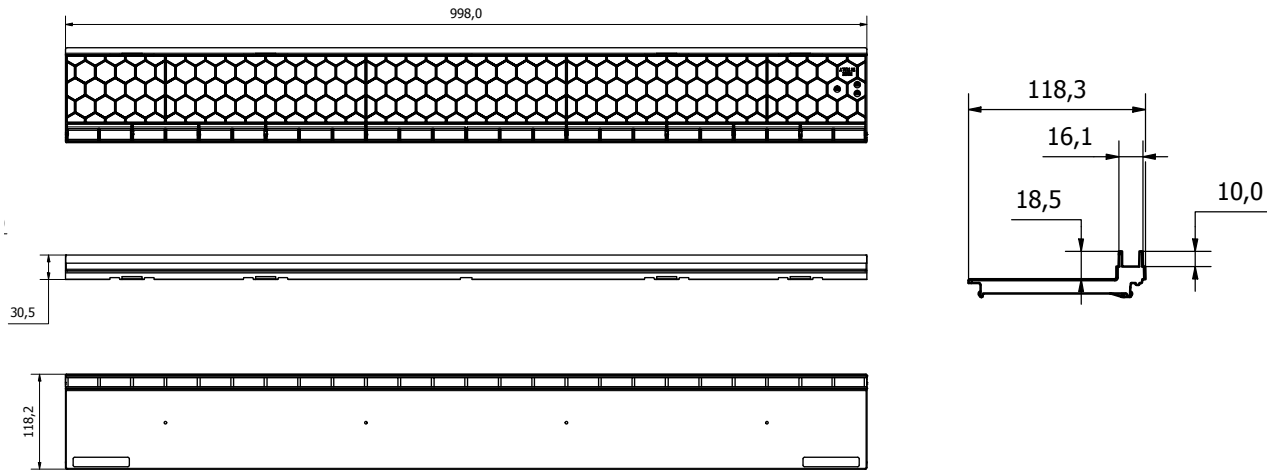

STAINLESS STEEL PROFILE DETAILS

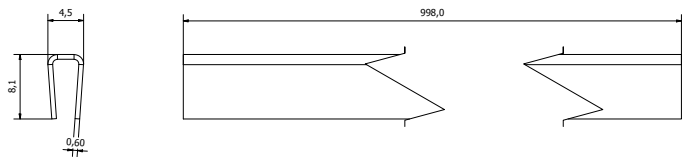


2. USE

Used for the collection and drainage of rainwater.
The matching to its range of gratings allows the use in pedestrian or light traffic areas.

3. FLOW RATE

The flow rate of the channel is calculated accordind to the Chezy Formula.



Ω = Channel Water Passage Section = $H \cdot L$
 $\Pi_{theoretical}$ = Perimeter Theoretical Moistened Max = $L + 2H$
 $\Pi_{measured}$ = Perimeter Measured Moistened Max
 R_i = Radius Plumber = $\Omega / \Pi_{measured}$
 i_f = Channel Slope
 X = Friction Coefficient

V = Water Speed
 $V = X \sqrt{(R_i \cdot i_f)}$
 γ = Bazin Coefficient
 $X = 87 / (1 + (\gamma / \sqrt{(R_i)}))$
 Q = Scope = $V \cdot \Omega$

CHANNEL	Water Passage						Friction Coef.	Bazin Coef.	Slope %				
	H	L	Ω	$\Pi_{theor.}$	$\Pi_{meas.}$	R_i			0,50 %	1,00 %	1,50 %	2,00 %	3,00 %
	mm	mm	mm	mm	mm				Flow Rate (Litres/second)				
Midi channel	66,5	91,8	5.965	223	205	29	64,36	0,06	4,63	6,55	8,02	9,26	11,34

MIDI CHANNEL H.50 WITH BLACK SLOT GRATING

H.20 WITH STAINLESS STEEL PROFILE

4. TECHNICAL SPECIFICATION

Specification	Description	Unity	Price
Dak.D.POZ90.1475FI/20	Supply and installation of drainage Midi Channel for collection of meteoric waters. It is available in black colour. Bottom outlet are ø 40/63/100 mm Channel dimension are 1000x121xh.70 (50mm channel + 20mm slot grating). The channel is sold with pre-mounted polypropylene Black Slot Grating h.20 with stainless steel profiles. Class A15, according to UNI EN 1433. Channel made of PP (polypropylene) - Grating made of PP (polypropylene) with stainless steel profile. Used for the collection and drainage of rainwater. Black.....	pc.	-